


CP- VNC-V41FR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.

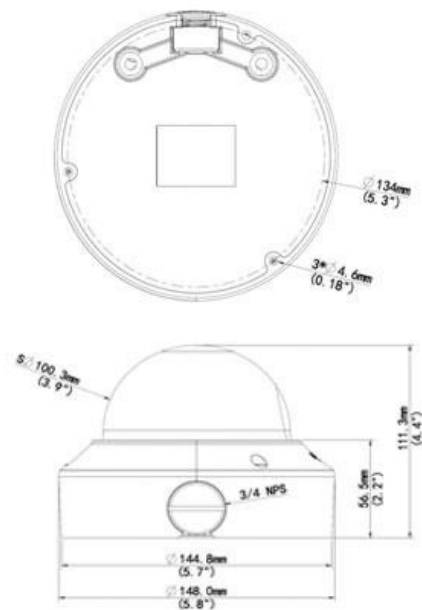

Main Features

- 1/3" 4MP PS CMOS Image Sensor
- Max: 20 fps@4MP(2592×1520)
- Ultra H.265, H.265, H.264, MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), 2D/3D-DNR, Digital Defog, Corridor Mode, ROI, AWB, AGC, BLC
- 2.8~12 mm Varifocal Lens
- IR Range of 30 Mtrs, Smart IR, Micro SD Card, IP67, IK10, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS



InstaStream

CE FC **RoHS**
COMPLIANT

CP- VNC-V41FR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.

Feature

Image Sensor
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Angle of View
 DORI Distance
 Gain Control (AGC)
 BLC
 Video Compression
 S/N Ratio
 Video Streaming
 Resolution
 Video Output
 Frame Rate
 Privacy Mask
 Motion Detection
 ICR
 ROI
 Audio Input
 Audio Compression
 Audio Output
 Audio
 Alarm IN
 Alarm Out
 Network Storage
 Dewarping
 Protocol

Specification

1/3" 4MP Progressive scan CMOS
 Colour: 0.005Lux (F1.4, AGC ON) 0Lux with IR on
 Auto/Manual, 1~1/100000 s
 Auto/Manual
 2.8~12 mm Varifocal Lens
 91.0° ~ 27° (H), 54.4° ~ 13.7° (V), 118.3° ~ 33.2° (O)
 2.8mm– 63 Detect (m) , 25.2 Observe (m), 12.6 Recognize (m), 6.3 Identify (m)
 12mm– 270 Detect (m) , 108 Observe (m), 54 Recognize (m), 27 Identify (m)
 Auto/Manual
 BLC,/HLC/WDR(120dB)
 Ultra H.265, H.265, H.264, MJPEG
 >55dB
 Triple
 2592 × 1520
 1 BNC, impedance 75 Ω; amplitude 1 V [p-p]
 Main Stream: 4MP (2592x1520), Max 20fps; 4MP (2560x1440), Max 25fps; 3MP (2048x1520),
 Max 30fps; Sub Stream: 2MP (1920x1080), Max 30fps; Third Stream: D1 (720x576), Max 30fps
 Up to 8 areas
 Up to 4 areas
 IR-cut filter with auto switch (ICR)
 Up to 8 areas
 impedance 35 kΩ; amplitude 2 V [p-p]
 G.711
 impedance 600 Ω; amplitude 2 V [p-p]
 Two-way audio Supported
 1 IN
 1 Out
 ANR, NAS(NFS)
 Support
 IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP,
 UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS, ONVIF (Profile S, Profile G, Profile T), API

CP- VNC-V41FR3-VMD

4 MP WDR Array Vandal Dome Camera - 30Mtr.

Feature

Smart Dtection

Network Storage

Ethernet

OSD

IR

Micro SD

Operating Temperature

Humidity

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

Intrusion, crossing line, motion detection, Audio detection, Face detection, Defocus, Scene Change, People counting

ANR, NAS(NFS)

1 RJ45 10M/100M Base-TX Ethernet

Up to 8 OSDs

Array Range of 30 Mtr., Smart IR

Micro SD, up to 256GB

-40°C ~ 60°C (-40°F ~ 140°F)

≤ 95% RH (non-condensing)

DC 12V±25%, PoE (IEEE 802.3af)

Max 7.2W

IP67 & IK10

Φ148 x 111.3 mm (Ø5.8" x 4.4")

0.92kg