
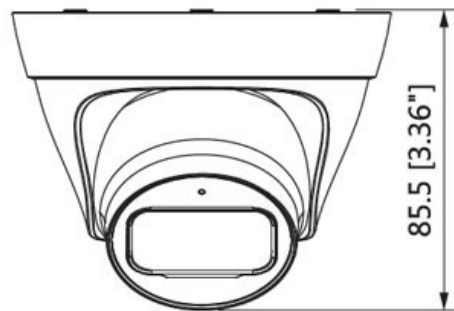


CP- UNC-DS21PL3**2 MP Full HD IR Dome Camera - 30Mtr.****Main Features**

- 1/2.7" 2MP PS CMOS Image Sensor
- 20fps@1080P(1920×1080)
- H.265+/ H.265 dual-stream encoding
- DWDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8 mm fixed lens (3.6 mm optional)
- IR Range of 30 Mtrs, IP67, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMs Pro

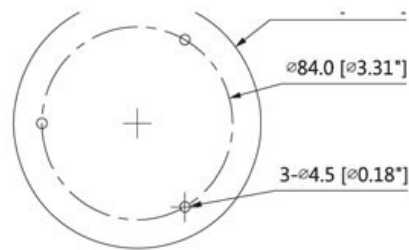

CP- UNC-DS21PL3

2 MP Full HD IR Dome Camera - 30Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 White Balance
 Lens
 Gain Control (AGC)
 Angle of View
 Video Compression
 S/N Ratio
 Back Light Compensation
 Resolution
 Frame Rate
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Bit Rate
 Protocol
 Ethernet
 User Account
 IR
 Smart Phone
 Operating Temperature
 Power Source
 Power Consumption
 Weatherproof Standard
 Dimension
 Weight

Specification

1/2.7" 2MP PS CMOS Image Sensor
 1920(H)x1080(V)
 0.09Lux/F2.0(Color,1/3s,30IRE) 0.5Lux/F2.0(Color,1/30s,30IRE) 0Lux/F2.0(IR on)
 Auto/Natural/Street Lamp/Outdoor/Manual
 2.8mm fixed lens (3.6mm optional)
 Auto/Manual
 H:115°/87.5°, V:60°/47°
 H.265+/H.265/H.264+/H.264H/MJPEG (Sub Stream)
 More than 50dB
 BLC/ HLC/ DWDR
 1080P(1920x1080)/1.3MP(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA
 (640x480)/ CIF(352x288/352x240)
 Main Stream: 1080P (1 ~ 20fps) ,Sub Stream: D1(1 ~ 25/30fps)
 16x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 H265:12K~5632K , H.264:32K ~8192K
 HTTP; TCP; ARP; RTSP; RTP; RTCP; UDP; DHCP; DNS; IPV4; NTP; Multicast; ICMP; TLS; ONVIF
 Profile S & G
 RJ-45 (10/100Base-T)
 20 Users
 IR Range of 30 Mtr.
 iPhone, iPad, Android Phone
 -30°C~+60°C , Less than 95%RH
 DC12V, PoE (802.3af)
 <4.8W
 IP67
 Φ109mmx85.5mm(4.29"x3.36")
 0.24Kg

