
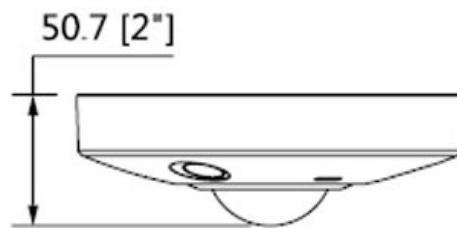


**CP- UNC-EH61L1-VM****6 MP Full HD Network IR Fish eye camera - 10 Mtr.****Main Features**

- 1/1.8" 6 MP PS CMOS Image Sensor
- H.265/H.264 triple-stream encoding
- Max 25/30fps@6MP (3072x2048)
- DWDR, Day/Night (ICR), 3DNR, ROI, Defog, AWB, AGC, BLC, HLC
- Multiple De-wrap Mode
- IR Range of 10 Mtr.
- Micro SD Card, IP67, IK10, PoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

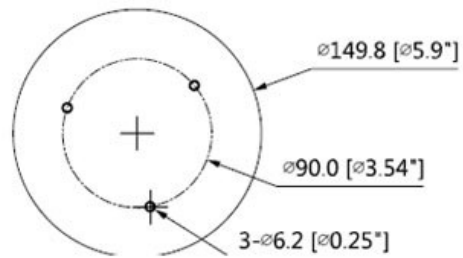

# CP- UNC-EH61L1-VM

6 MP Full HD Network IR Fish eye camera - 10 Mtr.



## Feature

Image Sensor  
Effective Pixels  
Minimum Illumination  
Shutter Speed  
White Balance  
Lens  
Gain Control (AGC)  
Video Compression  
S/N Ratio  
Back Light Compensation  
Video Streaming  
Resolution  
Digital Zoom  
Motion detection  
Privacy Mask  
ICR  
ROI  
Audio  
Audio Input  
Audio Output  
Audio Compression  
Alarm IN  
Alarm Out  
Bit Rate  
Interface  
Protocol  
Smart Detection  
Ethernet

## Specification

1/1.8" 6MP PS CMOS  
3072(H) x 2048(V)  
0.002Lux/F2.0( Color,1/3s,30IRE) 0.02Lux/F2.0( Color,1/30s,30IRE) 0Lux/F2.0(IR on)  
Auto/Manual, 1/3~1/100000s  
Auto/Natural/Street Lamp/Outdoor/Manual  
1.7mm  
Auto/Manual  
H.265/H.264  
More than 50dB  
BLC/ HLC/ DWDR  
Main Stream: 6MP(1~25/30fps) , Sub Stream: D1(1 ~ 25/30fps) , Third Stream: 1.3MP(1 ~ 25/30fps)  
6MP(3072x2048)/ 4MP(2048x2048)/ 3MP(2048x1536)/ UXGA(1600x1200)/ 1.3MP (1280x960)/ D1(704x576/704x480)/ CIF(352x288/352x240)  
16x  
Off / On (4 Zone, Rectangle)  
Off / On (4 Area, Rectangle)  
Auto (ICR)/Color/B/W  
Off / On (4 Zone)  
Built-in Mic  
1 Ch.  
1 Ch.  
G.711a/G.711Mu/AAC/ G.726  
2 channel In: 5mA 5VDC  
2 channel Out: 1A 30VDC / 0.5A 50VAC  
H.265: 3Kbps~ 9984Kbps , H.264: 8Kbps~ 16384Kbps  
1 RJ45  
HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP;DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour;802.1x;Multicast;ICMP;IGMP;SNMP, ONVIF, PSIA, CGI  
Tripwire, Intrusion, Heat Map  
RJ-45 (100/1000Base-T)



**CP- UNC-EH61L1-VM****6 MP Full HD Network IR Fish eye camera - 10 Mtr.****Feature**

User Account

Smart Phone

IR

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

**Specification**

20 users

iPhone, iPad, Android Phone

IR Range of 10 Mtr.

Micro SD, up to 128 GB

-30°C~+60°C, Less than 95%RH

DC12V, PoE (802.3af)

&lt;12W

IP67, IK10

Φ149.8mm x 50.7mm (Φ5.9"×2")

0.58kg