


CP- UNC-VC41ZL4-VMDS**4MP WDR IR Vandal Dome Camera - 40Mtr.****Main Features**

- 1/3" 4Megapixel PS CMOS Image Sensor (0.84667 centimeters)
- Max. 4MP(2688 × 1520)@30fps
- Instastream, H.265 and H.264+ triple-stream encoding
- WDR(120dB), Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC
- 2.7mm~13.5mm Motorized Lens
- IR Range of 40 Mtrs, IP67, IK10, Micro SD Card, PoE
- Support Starlight Technology
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro

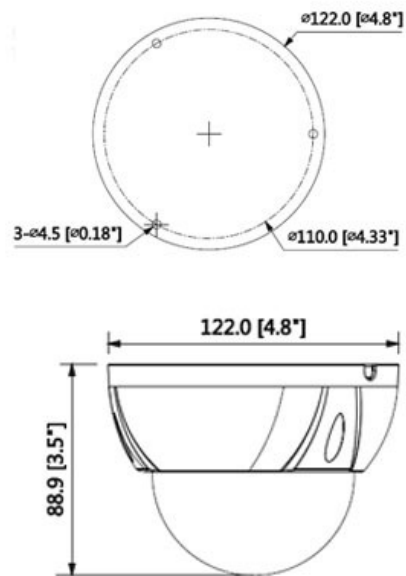

CP- UNC-VC41ZL4-VMDS

4MP WDR IR Vandal Dome Camera - 40Mtr.

Feature

Image Sensor
 Minimum Illumination
 Effective Pixels
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Video Compression
 Angle of View
 Back Light Compensation
 Video Streaming
 Resolution
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 Event Trigger

Specification

1/3" 4Megapixel progressive CMOS (0.84667 centimeters)
 0.005 Lux@F1.6
 2688 (H) ×1520 (V)
 Auto/Manual, 1/3~1/100000s
 Auto/natural/street lamp/outdoor/manual/regional custom
 2.7mm~13.5mm Motorized
 Auto/Manual
 Instastream/H.265/H.264+/H.264/H.264H; H.264B; MJPEG
 Horizontal: 104°-27° Vertical: 57° -15° Diagonal: 124° -31°
 BLC / HLC / WDR(120dB)
 Main stream (2688 × 1520@1-25/30 fps) sub stream (704 × 576@1-25/30 fps) third stream (1280 × 720@1-25/30 fps)
 4M (2688 × 1520); 3M (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)
 OFF/ON (4 areas, rectangular)
 4 areas
 ICR auto switch
 Yes (4 areas)
 1-channel (RCA port)
 1-channel (RCA port)
 G.711a; G.711Mu; G726; AAC
 1 channel in: 5mA 3V-5V DC
 1 channel out: 300mA 12V DC
 H.264: 3 Kbps-8192 Kbps H.265: 3 Kbps-8192 Kbps
 HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; SNMP; QoS; UPnP; NTP; ONVIF (Profile S/Profile G); CGI; InstaOn cloud
 Tripwire; intrusion (Recognition of human and vehicle)
 RJ-45 (10/100Base-T)
 Motion detection, video tampering, scene changing, audio abnormality detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection

CP- UNC-VC41ZL4-VMDS

4MP WDR IR Vandal Dome Camera - 40Mtr.

Feature

User/Host

Smart Phone

IR

Micro SD

Operating Temperature

Power Source

Power Consumption

Weatherproof Standard

Casing

Dimension

Weight

Specification

20 Users

iPhone, iPad, Android Phone

IR Range of 40 Mtr.

FTP, Micro SD card 512GB, NAS

-30°C to +60°C (-22°F to +140°F) /less than≤95%

12V DC/PoE

<7W

IP67 & IK10

Metal + Plastic

Φ122 mm × 88.9 mm

492 g