
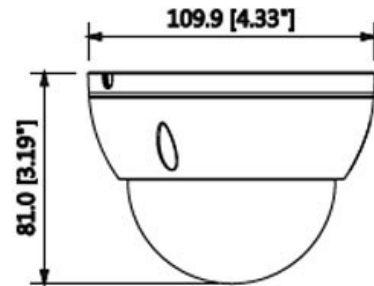


CP- UNC-VD4K081L3E-VMD**4K Full HD WDR IR Vandal Dome Camera - 30Mtr.****Main Features**

- 1/2.5" 8MP Progressive Scan CMOS
- 15fps@4K, 25/30fps@3M
- H.265 and H.264 triple-stream encoding
- WDR, Day/Night (ICR), 3D-DNR, ROI, AWB, AGC, BLC, HLC
- 2.8mm fixed lens (4mm optional)
- IR Range of 30 Mtrs, IP67, IK10, SD Card, ePoE
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

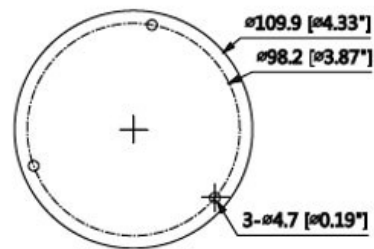

CP- UNC-VD4K081L3E-VMD

4K Full HD WDR IR Vandal Dome Camera - 30Mtr.



Feature

Image Sensor
 Effective Pixels
 Minimum Illumination
 Shutter Speed
 White Balance
 Lens
 Gain Control (AGC)
 Angle of View
 Video Compression
 S/N Ratio
 Back Light Compensation
 Video Streaming
 Resolution
 Digital Zoom
 Motion detection
 Privacy Mask
 ICR
 ROI
 Audio Input
 Audio Output
 Audio Compression
 Alarm IN
 Alarm Out
 Bit Rate
 Protocol
 Smart Detection
 Ethernet
 User Account
 IR

Specification

1/2.5" 8MP Progressive scan CMOS
 3840(H)x2160(V)
 0.06Lux/F1.6(Color,1/3s,30IRE) 0.3Lux/F1.6(Color,1/30s,30IRE) 0Lux/F1.6(IR on)
 Auto/Manual, 1/3~1/100000s
 Auto/Natural/Street Lamp/Outdoor/Manual
 2.8mm fixed lens (4mm optional)
 Auto/Manual
 H:112° (88°), V:69° (48°)
 H.265+/H.265/H.264+/H.264
 More than 50dB
 BLC / HLC / WDR(120dB)
 Main Stream: 4K(1~15fps)/3M(1~25/30fps) Sub Stream: D1(1~25/30fps) Third Stream: 1080P(1~25/30fps)
 4K(3840x2160)/6M(3072x2048)/5M(2560x1920)/ 3M(2048x1536)/3M(2304x1296)/ 1080P (1920x1080)/ 1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)
 16x
 Off / On (4 Zone, Rectangle)
 Off / On (4 Area, Rectangle)
 Auto (ICR)/Color/B/W
 Off / On (4 Zone)
 1 Channel
 1 Channel
 G.711a/ G.711Mu/ AAC/ G.726
 1 channel In: 5mA 5VDC
 1 channel Out: 300mA 12VDC
 H.264: 24K ~ 10240Kbps, H.265: 14K ~ 9984Kbps
 HTTP; HTTPs; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPOE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP, ONVIF, PSIA, CGI
 Tripwire, Intrusion, Object Abandoned/Missing, Face detection
 RJ-45 (10/100Base-T)
 10/ 20 Users
 IR Range of 30 Mtr.



CP- UNC-VD4K081L3E-VMD**4K Full HD WDR IR Vandal Dome Camera - 30Mtr.****Feature**

Smart Phone
Micro SD
Operating Temperature
Power Source
Power Consumption
Weatherproof Standard
Dimension
Weight

Specification

iPhone, iPad, Android Phone
Micro SD card 128GB
-30° C ~ +60° C, Less than 95% RH
DC12V, ePoE
<5.5W
IP67 & IK10
Φ109.9mm×81mm
0.41kg