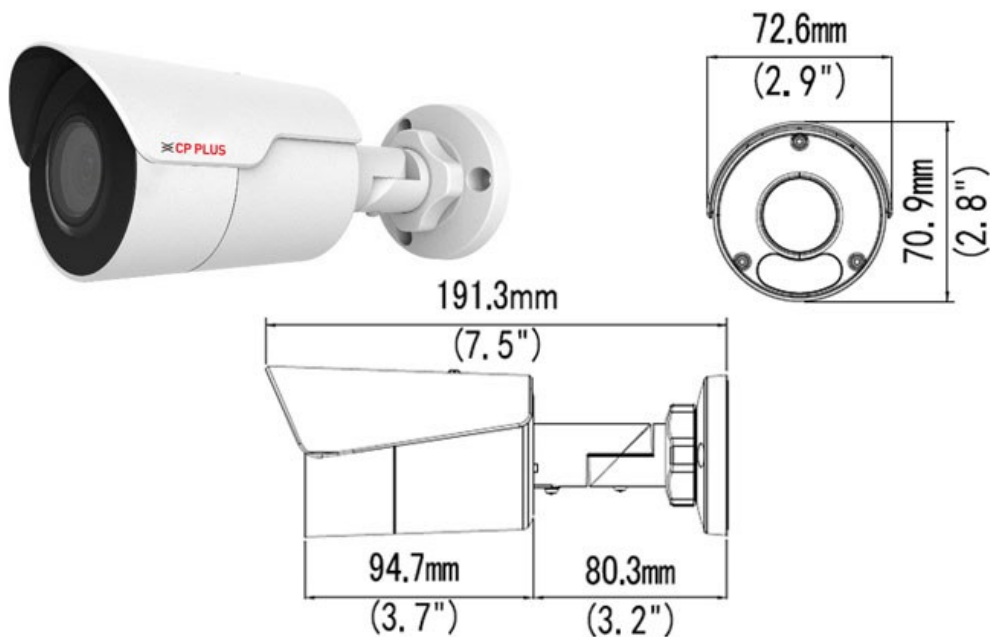


CP-VNC-T4KR3-D**4K WDR Array Network Bullet Camera - 30Mtr.****Main Features**

- 1/2.5" 8MP PS CMOS Image Sensor
- Max. 20fps@8MP (3840 x 2160)
- Ultra 265,H.265, H.264,MJPEG Triple-stream encoding
- WDR(120dB), Day/Night (ICR), Corridor mode, Digital, Defog, 2D/3D-DNR, ROI, AWB, AGC, BLC, HLC
- 3.6mm Lens (6mm Optional)
- IR Range of 30 Mtrs, Smart IR, IP67, PoE
- Supports Instastream technology, save disk space and bandwidth upto 70%
- Mobile Software: Android, iOS
- CMS Software: IVMS

**InstaStream**

CP- VNC-T4KR3-D

4K WDR Array Network Bullet Camera - 30Mtr.

Feature

Image Sensor

Minimum Illumination

Shutter Speed

White Balance

Gain Control (AGC)

Lens

DORI Distance

Video Compression

Angle of View

Back Light Compensation

S/N Ratio

Video Streaming

Frame Rate

Motion detection

Privacy Mask

ICR

ROI

Protocol

Ethernet

Dewarping

OSD

IR

Operating Temperature

Humidity

Casing

Power Source

Power Consumption

Weatherproof Standard

Dimension

Weight

Specification

1/2.5" 8MP Progressive scan CMOS

Colour: 0.05Lux (F2.0, AGC ON) 0Lux with IR on

Auto/Manual, 1~1/100000 s

Auto/Manual

Auto/Manual

3.6mm (6mm Optional)

3.6mm- 72 Detect (m) , 28.8 Observe (m), 14.4 Recognize (m), 7.2 Identify (m)

6mm- 108 Detect (m) , 43.2 Observe (m), 21.6 Recognize (m), 10.8 Identify (m)

Ultra 265,H.265, H.264,MJPEG

3.6mm- 91.6°(H) 47.2°(V) 112.7°(O) , 6mm - 54.2°(H) 32.5°(V) 66.7°(O)

BLC / HLC / WDR(120dB)

>52dB

Triple

Main Stream: 8MP (3840x2160): Max. 20 fps, Sub Stream: 1080P (1920x1080): Max. 30 fps;

Third Stream: D1(720x576) : Max. 30 fps

Up to 4 areas

Up to 8 areas

IR-cut filter with auto switch (ICR)

Up to 8 areas

IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS, ONVIF (Profile S, Profile T), API

1 RJ45 10M/100M Base-TX Ethernet

Support

Up to 8 OSDs

IR Range of 30 Mtr., Smart IR

-30°C ~ 60°C (-22°F ~ 140°F)

≤95% RH (non-condensing)

Metal

12 V DC±25%, PoE (IEEE802.3 af)

Max 8 W

IP67

191.3 ×72.6 ×70.9mm (7.5" × 2.9" × 2.8")

0.5 kg